

WH-GT Geared Trolley

Standards: British Standard BS EN13157:2004 + A1:2009.

Proof Tested: 1.5 x WLL.

Safety factor: 4:1.

Temperature range: -20°C to +120°C.



Track width range: 50mm to 305mm. Trolleys available with standard (range 1) or extended (range 2) trolley bars to fit a range of beam widths.

End stops: Fitted as standard.

Anti-tilt: Fitted as an optional extra.

Attachment: Hanging plate.

Paint coating: Marine paint 3 layer Category C5.

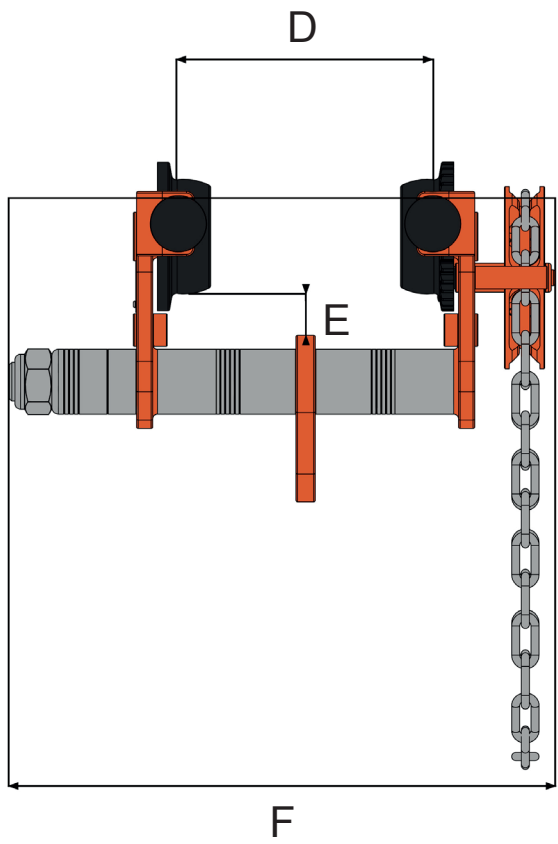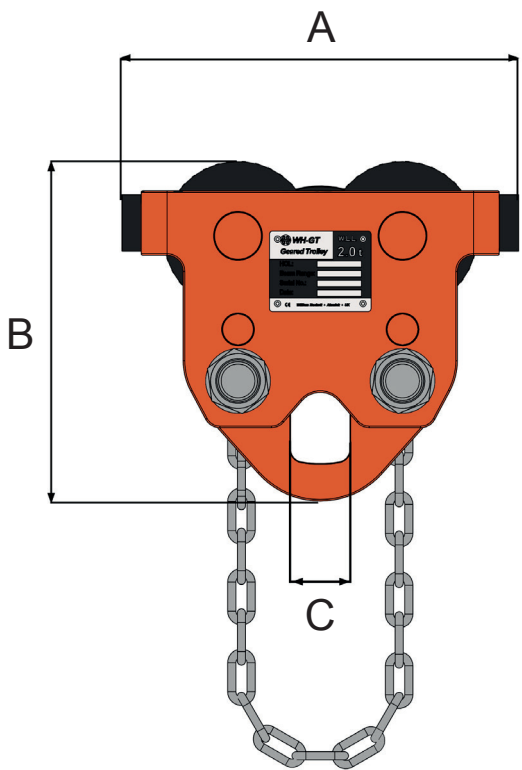

Specifications

Part Code	WLL tonnes	Min. radius of Curve m	A mm	B mm	C mm	E mm	I Beam width D mm		F mm		Mass kg	
							Std. Range1	Ext. Range 2	Std. Range1	Ext. Range 2	Std. Range1	Ext. Range 2
057.050	0.50	0.80	199	159	22	28	50-203	-	322	-	7.6	-
057.100	1.00	0.90	221	185	30	30	64-203	64-305	326	431	9.8	11.2
057.200	2.00	1.00	288	226	36	36	88-203	88-305	346	448	15.7	17.6
057.320	3.20	1.20	334	279	45	45.5	100-203	100-305	365	472	26.4	28.9
057.500	5.00	1.30	407	311	55	50	114-203	114-305	381	483	39.6	43.4
057.1000	10.00	2.00	525	383.5	65	60	124-203	124-305	403	506	70.5	75.0

Standards: British Standard BS EN13157:2004 + A1:2009.

Proof Tested: 1.5 x WLL.

Safety factor: 4:1.

Temperature range: -20°C to +120°C.



Track width range: 2.0 inches to 12.0 inches. Trolleys available with standard (range 1) or extended (range 2) trolley bars to fit a range of beam widths.

End stops: Fitted as standard.

Anti-tilt: Fitted as an optional extra.

Attachment: Hanging plate.

Paint coating: Marine paint 3 layer Category C5.

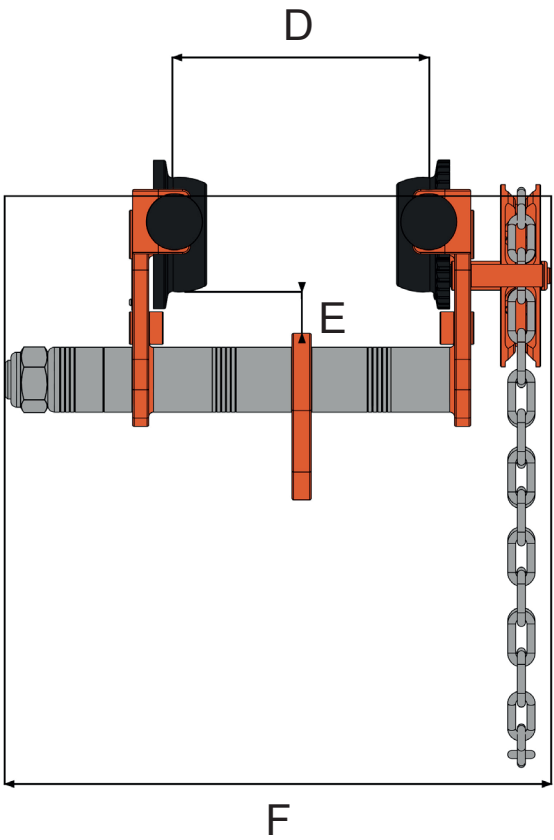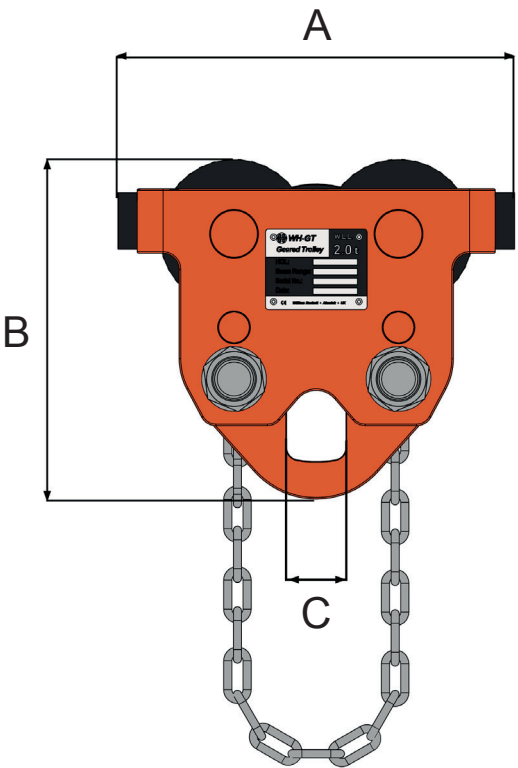

Specifications

Part Code	WLL tons	Min. radius of Curve ft	A inch	B inch	C inch	E inch	I Beam width D inch		F inch		Mass lbs	
							Std. Range1	Ext. Range 2	Std. Range1	Ext. Range 2	Std. Range1	Ext. Range 2
057.050	0.50	2.62	7.83	6.26	0.87	1.10	2.0 - 8.0	-	12.7	-	16.8	-
057.100	1.00	2.95	8.70	7.28	1.18	1.18	2.5 - 8.0	2.5 - 12.0	12.8	17.0	21.5	24.7
057.200	2.00	3.28	11.34	8.90	1.42	1.42	3.5 - 8.0	3.5 - 12.0	13.6	17.6	34.5	38.8
057.320	3.20	3.94	13.15	10.98	1.77	1.79	4.0 - 8.0	4.0 - 12.0	14.4	18.6	58.2	63.7
057.500	5.00	4.27	16.02	12.24	2.17	1.97	4.5 - 8.0	4.5 - 12.0	15.0	19.0	87.3	95.7
057.1000	10.00	6.56	20.67	15.10	2.56	2.36	5.0 - 8.0	5.0 - 12.0	15.9	19.9	155.4	165.4